

Overview

HP ProLiant ML310e Gen8, a single-socket 4U tower server, delivers essential availability and expansion needed to accommodate changing business needs. It is ideal for remote sites and corporate branch offices running file/print, web messaging, and small vertical applications or databases.

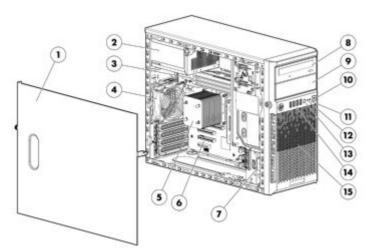



Front View:

- 1. Quick removal access panel
- 2. Power Supply
- 3. Four DIMM slots
- 4. System fan
- 5. Processor Heatsink
- 6. Four (4) PCIe expansion slots
- 7. PCI Fan
- 8. Half Height SATA DVD-ROM or DVD RW Optical Drive
- 9. Media Drive Blank
- 10. Power Button
- 11. NIC Activity LED
- 12. System Health
- 13. UID LED button
- 14. Four (4) USB connectors
- 15. Four (4) LFF or Eight (8) SFF SAS/SATA HDD cage

What's New

• Updating supported options

Rear View:

- 1. Power supply
- 2. Slot 4 PCIex16
- 3. Slot 3 PClex8
- 4. Slot 2 PClex8
- 5. Slot 1 PClex4
- 6. PCIe card bracket
- 7. Serial Connector
- 8. Video Connector
- 9. UID LED Button
- 10. iLO Dedicated Lan Port (optional)
- 11. NIC Connector 1 (shared management)
- 12. NIC Connector 2
- 13. Four (4) USB Connectors



Standard Features

NOTE: For the Standar Factory Integrated Mod	d Features shipped in the "Factory Integrated Models", please see the "Configuration Information - lels" section.
Processor One of the following depending on Model	Entry Processors NOTE: Intel® Celeron® G540 supports up to 1066MHz DDR3 memory speed. Intel® Celeron® G1610 and G1620 and Intel® Pentium® G860and G2020 support up to 1333 MHz DDR3 memory speed.
	Celeron G1610, G1620 and Pentium G860 and G2020 processors, performance for 1600MHz memory is clocked down to 1333MHz.
	Intel® Celeron® G1610 (2.6GHz/2-core/2MB/55W) Processor
	Intel® Celeron® G1620 (2.7GHz/2-core/2MB/55W) Processor
	Intel® Pentium® G2020 (2.9GHz/2-core/3MB/55W) Processor
	Intel® Pentium® G2120 (3.1GHz/2-core/3MB/55W) Processor
	Intel® Pentium® G2130 (3.2GHz/2-core/3MB/55W) Processor
	Base Processors
	NOTE: All support up to 1600MHz DDR3 memory speeds.
	Intel® Core™ i3-3220 (3.3GHz/2-core/3MB/65W, HT) Processor
	Intel® Core™ i3-3240 (3.4GHz/2-core/3MB/65W, HT) Processor
	NOTE: HT indicates that the processor model supports Intel® Hyper-Threading Technology. NOTE: DDR3 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed (options for 1600, 1333, 1066MHz).
Cache Memory One of the following	3MB (1 x 3MB) L3 Cache NOTE: For Dual-core Xeon, Core i3, and Pentium processors.
depending on Model	2MB (1 x 2MB) L3 Cache
	NOTE: For Dual-core Celeron processors.
	NOTE: All processor models above list the L3 Cache associated with that particular processor.
Chipset	Intel® C204 Chipset
	NOTE: For more information regarding Intel® chipsets, please see the following URL: http://www.intel.com/products/server/chipsets/.
Upgradeability	Upgradeable to 4 cores NOTE: Total 2 or 4 cores
	Up to 4 DIMM slots available for higher memory capacity
	Up to 8 SFF Hard Drive Bays; Or 4 LFF Hard Drive Bays
	1 x8 and 1 x16 PCIe 3.0 (depends on processor) and 1 x8 and 1x4 PCIe 2.0 I/O slots for additional communications and storage expansion
	Redundant Power Supply

On System ManagementHP iLO (Firmware: HP iLO4)

Processor	NOTE: For more information, visit: http://www.hp.com/go/ilo
-----------	--



Standard Features

Memory Protection ECC

Expansion Slots	Expansion Techn	blogy Bus Width* Connector Form	Factor Notes
Network Controller	HP Ethernet 1Gb 2-port 3	30i Adapter	
	at 1600MHz, 1333MHz, c	memory configuration and processor model, the r 1066MHz. Please see Memory Population Tabl v.hp.com/go/ddr3memory-configurator.	
	NOTE: HP memory from ML310e Gen8 Server.	previous generation servers are not fully compatib	le with the HP ProLiar
	Maximum Capacity (UDIMM)	32 GB (4 x 8 GB UDIMM @1600MHz)	
	Standard (Performance Models)	4GB (1 x 4GB) PC3-12800E DDR3 UDIMM	
	Standard (Base Models)	2GB (1 x 2GB) PC3-12800E DDR3 UDIMM	
depending on model	DIMM Slots Available	4	
One of the following	i ypc	DDR3 Unbuffered (UDIMM)	
Memory	Туре	HP SmartMemory	

Expansion Slot #	Technology	Bus Width*	Connector Width	Form Factor	Notes
4	PCle 3.0	X8	X16	Full Length/Full Height	
3	PCle 3.0	X8	X8	Full Length/Full Height	
2	PCIe 2.0	X4	x8	Full Length/Full Height	
1	PCIe 2.0	X1	X4	Half Length/Full Height	



Standard Features

signature is verified before	emory) is now digitally signed using HP's Corporate Signing Service. This ore the flash process starts, reducing accidental programming and forts to corrupt system ROM.		
passed to the customer	ssential initialization and validation of hardware components before control is -installed operating system. The ROM also provides the capability of booting a (HDD, CD-ROM) and removable media (USB), to continue operation to the		
HP ROM performs very early configuration of the video controller, to allow monitoring of initialization progress via an attached monitor. If configuration or hardware errors are discovered during this early phase of hardware initialization, suitable messages are now displayed on the connected monitor. Additionally, these configuration or hardware errors are logged to the Integrated Management Log (IML) to assist in diagnosis			
HP's ProLiant ROM is u	used to configure the following:		
 System memory, System hardware Customer-specific NOTE: For further inform 	hipset status registers memory map, and memory initialization configuration (Integrated PCI devices and optional PCIe cards). c BIOS configuration (using the HP ROM-Based Setup Utility (RBSU). mation, please refer to HP's RBSU (ROM based setup utility) user guide:		
 HP Dynamic Smart Array B120i Controller NOTE: Supports 3.0Gb/s SATA NOTE: Supports RAID 0/1/10 only. No FBWC support. For FBWC, a standup Smart Arra card must be configured. NOTE: For set up instructions, please refer to the HP ProLiant ML300 series server user NOTE: For general information about HP Smart Array B120i SATA RAID Controller, pleat http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/smartarray/ index.html 			
Optical Drives One of the following depending on model	HP Half-Height SATA DVD-ROM Optical Drive HP Half-Height SATA DVD-RW Optical Drive		
•			
One of the following depending on model	HP Half-Height SATA DVD-RW Optical Drive		
One of the following depending on model	HP Half-Height SATA DVD-RW Optical Drive 1x500GB NHP LFF SATA HDD included in Entry Model		
	signature is verified befor preventing malicious effor HP ROM provides for each passed to the customer from various fixed media operating system. HP ROM performs very progress via an attached phase of hardware initia Additionally, these confit (IML) to assist in diagno HP's ProLiant ROM is u Processor and ch System memory, System hardware Customer-specifie NOTE: For further inform www.hp.com/support/rb HP Dynamic Smart Arra NOTE: Supports 3.0Gb NOTE: Supports 3.0Gb NOTE: For set up instru NOTE: For general infor NOTE: For general infor		



Standard Features				
Maximum Internal Storage	Hot Plug LFF SAS Hot Plug SFF SAS	16TB 9.6TB	4 x 4TB 8x 1.2 TB	
One of the following depending on model	Non Hot Plug LFF SAS	2.4TB	4 x 600GB	
depending on model	Hot Plug LFF SATA	16TB	4 x 4TB	
	Hot Plug SFF SATA	8TB	8 x 1TB	
	Non Hot Plug LFF SATA	12TB	4 x 3TB	
	Hot Plug SFF SATA SSD	6.4TB	8 x 800GB	
	Hot Plug LFF SATA SSD	800GB	4 x 800GB	
Interfaces	Serial	1 (rear)		
	Video	1 (rear)		
	Network RJ-45 (Ethernet)	2 (1 shared for HP Integra	ated Lights-Out)	
	HP iLO Remote Management Network Port	1 Gb Dedicated (Optional)	
	SD slot		a hot-pluggable device. Customers should not rd into the SD slot while the server is powered.	
	USB	10 (4 front, 4 rear, 1 intern	nal standard USB and 1 internal USB header)	
Industry Standard	ACPI 2.0b Compliant			
Compliance	PCIe 3.0 Compliant			
	PXE Support			
	WOL Support			
	Microsoft® Logo certifications			
	USB 2.0 Support			
Server Power Cords	The ProLiant ML310e Gen8 server is a tower server that ships standard with a 6' country specific NEMA power cord that allows connection to wall outlets in a home or office. If customers require additional local power cords, they can check the power cord matrix for the appropriate country specific sku. Please see the following power cord matrix: http://www.hp.com/go/powercordmatrix. To install the ML310e Gen8 server in a rack, the Tower to Rack Conversion kit (417705-B21) is required as well as a PDU power cord (416151-B21) to connect to a PDU in a data center rack.			
Power Specifications	ns To review typical system power requirements, use the HP Power Advisor which is available via download at URL: www.hp.com/go/proliant-energy-efficient or www.hp.com/go/hppoweradvisor			
		on and Technical Content for om/products/quickspecs/14	or supported power supplies can be found at: 209_div/14209_div.html	

Standard Features

Power Supplies The ML310e Gen8 supports two power supplies, a 350W Multi-Output Power Supply and a 460W Common Slot Gold Power Supply. The 350W Multi-Output Power Supply is a non-redundant power supply with an efficiency rating of 85%. HP's Common Slot (CS) power supplies allow for commonality of power supplies across a wide range of ProLiant and Integrity servers, as well as HP Storage solutions, and are designed to provide the highest power supply efficiency without degrading system performance. HP CS power supplies are tested by the Electric Power Research Institute (EPRI) and certified through the ECOS 80 Plus power supply program. The 460W HP CS power supply option provides an efficiency rating of up to 92%. All HP Common Slot power sources are UL, CE Mark Compliant, hot-plug and support redundant configurations. **NOTE:** Mixing of power supplies in the same server is not supported. All power supplies must be of the same output and efficiency rating. If non-matched power supplies are inserted you will get errors and operation will fail. It is highly recommended that you use the HP Power Advisor in defining the "Right-Size" power supply for your needs. HP Power Advisor can be accessed at: www.hp.com/go/hppoweradvisor. **NOTE:** The 80 PLUS program is a unique forum that unites electric utilities, the computer industry, and consumers in an effort to bring energy efficient technology solutions to the marketplace. 80 Plus independently tests power supply efficiency and publicly posts the results on 80Plus.org. Redundant Power: Optional (1 + 1 redundant) power supplies can be purchased through power supply option kits (see Power Supplies for part numbers). NOTE: Power Specification and Technical Content for supported power supplies can be found at: http://h18000.www1.hp.com/products/quickspecs/14209 div/14209 div.html System Fans One (1) Non-redundant system fan ships standard One (1) Non-redundant PCIe fan ships standard **Operating Systems and Microsoft Windows Server** Virtualization Software Red Hat Enterprise Linux (RHEL) Support for ProLiant SUSE Linux Enterprise Server (SLES) Servers **VMware** NOTE: For more information on HP's Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: http://www.hp.com/go/ossupport and our driver download page: http://www.hp.com/support/ML310eGen8.



Standard Features

Standard Features		
Graphics	Integrated Matrox G200	video standard
	 1280 x 1024 (32 b) 1920 x 1200 (16 b) 	
	HP iLO 4 On System M	anagement Memory
	 16 MB Flash 256 MB DDR 3 with 	ith ECC (112 MB after ECC and video)
Form Factor One of the following depending on model	8 SFF Drive Bay Cage: 4.6" (11.72cm) Height x 4 LFF Drive Bay Cage:	chassis with feet/bezel: x 6.89" (17.5cm) Width x 18.71" (47.52cm) Length x 5.74" (14.57cm) Width x 4.79" (12.16cm) Length x 5.74" (14.57cm) Width x 6.90" (17.54cm) Length
On System Management	HP iLO Management Engine	 HP iLO Management Engine is a comprehensive set of embedded management features supporting the complete lifecycle of the server, from initial deployment, through ongoing management, to service alerting and remote support. HP iLO Management Engine comes standard on all HP ProLiant Gen8 servers. The HP iLO Management Engine portfolio includes: HP iLO: The HP iLO (Integrated Lights-Out) management processor is the core foundation for the HP iLO Management Engine. HP Agentless Management: Provides built in server health monitoring and alerting capability without OS agents, that starts working the moment a power cord and an Ethernet cable are connected. HP Active Health System: Always on, continuous monitoring for increased stability and shorter downtimes; 100% configuration history; Health and service alerts and easy export and upload to Service and Support. HP Intelligent Provisioning: Lets customers provision and configure a single server without any separate media. No more SmartStart CDs or Smart Update Firmware DVD are needed. To start Intelligent Provisioning: Press the F10 key during the ProLiant Gen8 server boot process (also known as power on self test or POST). Please go to the Intelligent Provisioning for additional information and to view usage videos. Use the Service Pack for ProLiant (SPP) at www.hp.com/go/spp to get firmware and software updates. HP iLO Mobile App: Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please



Standard Features		
		: For more information, visit: http://www.hp.com/go/ilo or HP iLO gement Engine technologies whitepaper
HP Insight Management HP S ProLi	ant SUM) softwa and e caden enabli syster faster entire stabili	ervice Pack for ProLiant (SPP) and HP Smart Update Manager (HP provide a comprehensive approach to firmware and system are maintenance. Together they provide better operating stability insure maximum uptime. The SPP will be updated at a predictable ce, typically coinciding with new HP server hardware launches. By ing firmware to be updated online and integrating firmware and in software updates in one operation, HP SUM and the SPP offer updates of individual servers and dramatically faster updates of BladeSystem enclosures. Further improving system uptime and ty is the fact that HP provides 12 months of support for each are Pack for ProLiant release.
	severa provid HP SI types downl intuitiv discov availa also a share provid compa firmwa	ser experience around HP SUM and the SPP has been improved in al ways, starting with the web download. A single web page es access to a single download containing both the latest version of JM and the latest SPP. Optional smaller subsets with only specific of servers or specific operating systems are offered to save on boad time. The HP SUM application provides a straightforward, re user interface that guides the user through the steps of rery, analyses and update, providing comprehensive information on ble updates, criticality and interdependencies. This information is vailable in reports. By providing the option of multiple local or d repositories which can be easily updated from hp.com, HP SUM es the tools to optimize stability and consistency throughout the any. While HP SUM and the SPP recommend the combinations of are and system software that HP has found to be the best practice, plication gives customers the flexibility to set their own specific ne.
	attent the se compo ensur deploy	ervice Pack for ProLiant has been rigorously tested with specific on for interaction between firmware, drivers and agents both within rver as well as in interaction with the BladeSystem enclosure onents (Onboard Administrator and Virtual Connect). This testing es the highest quality as well as providing the input for HP SUM to γ updates taking into account all interdepencies, when determining rrect updates and order of update deployment.
	downl be fou	: The Service Pack for ProLiant (which includes HP SUM) can be baded from www.hp.com/go/spp/download. More information can nd: http://www.hp.com/go/SmartUpdate, www.hp.com/go/spp and www.hp.com/go/hpsum
-	r-on password nistrator's password	

Administrator's password



Standard Features

Warranty

This product is covered by a global limited warranty and supported by HP Services and a worldwide network of HP Authorized Channel Partners resellers. Hardware diagnostic support and repair is available for three years from date of purchase. Support for software and initial setup is available for 90 days from date of purchase. Enhancements to warranty services are available through HP Care Pack services or customized service agreements. Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details.

NOTE: Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response. (3-1-1 warranty offered in Brazil only). Warranty repairs may be accomplished through the use of Customer Self Repair (CSR) parts. These parts fall into two categories: 1) Mandatory CSR parts are designed for easy replacement. A travel and labor charge will result when customers decline to replace a Mandatory CSR part; 2) Optional CSR parts are also designed for easy replacement but may involve added complexity. Customers may choose to have HP replace Optional CSR parts at no charge. Additional information regarding worldwide limited warranty and technical support is available at:

http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html



Optional Features

 HP iLO Advanced HP iLO Advanced HP iLO Advanced HP ILO Essentials HP iLO Essentials	HP Insight Management HP Insight Control	 HP Insight Control, a product option, delivers essential infrastructure management that can help save time and money by making it easy to deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. HP Insight Control also supports Location and Power Discovery Services to automate many configuration, asset tracking, and power management tasks to speed implementation and prevent downtime. For more information, see http://www.hp.com/go/insightcontrol. HP Insight Control includes one year of 24 x 7 HP Software Technical Support and Update Service ensuring rapid access to HP support staff and proactive delivery of software updates. For more information about
customers. The specially created HP iLO Essentials (a subset of iL Advanced functionality) saves SMB customers time and money, by of remote server set up through the interactive virtual media, lowerin operational costs with remote access via the Integrated Remote Co and faster time to resolution with email-based proactive notification this newly designed HP iLO Essentials license you now have the o offering your SMB customers a server management package solely design and priced for their small business environments. HP iLO Essentials is available on all HP ProLiant Gen8 e-series ma	HP iLO Advanced	 this service, see: http://www.hp.com/services/insight. HP Integrated Lights-Out Advanced License a product option, providing smart remote server management without compromise. iLO Advanced unlocks the full set of remote administration functionality for all HP ProLiant servers by activating the full Virtual Keyboard Video and Mouse remote console, multi-user collaboration, console record and replay, GUI-based and scripted virtual media and virtual folders, and enhanced security and power management functionality. For more information, see:
	HP iLO Essentials	customers. The specially created HP iLO Essentials (a subset of iLO Advanced functionality) saves SMB customers time and money, by ease of remote server set up through the interactive virtual media, lowering operational costs with remote access via the Integrated Remote Console, and faster time to resolution with email-based proactive notifications. With this newly designed HP iLO Essentials license you now have the option of offering your SMB customers a server management package solely design and priced for their small business environments.
		HP iLO Essentials is available on all HP ProLiant Gen8 e-series making this an ideal solution for small business owners.

Storage Software

Whether you need to solve a specific data protection, archiving, or storage command and control challenge, or deliver on strategic consolidation, compliance, or continuity initiatives, look no further than HP storage software. Our storage software helps you reduce costs, simplify storage infrastructure, protect vital assets and respond faster to business opportunities.

Storage software that gets the job done:

- Data Protection and Recovery Software Whether you're a large enterprise or a smaller business, HP data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.
- Data Archive and Migration Software HP's storage software enables you to comply with data retention and retrieval requirements, improve application performance, and reduce costs by efficiently migrating infrequently accessed or less valuable data to lower cost storage.
- Storage Resource Management Software (SRM) HP's storage resource management software reduces operational costs and provides the command and control foundation you need to efficiently manage and visualize your physical and virtual environments.



Optional Features	
	 Data Replication Software HP offers array-based and host-based replication software for use in disaster recovery, testing, application development and reporting. Storage Device Management Software Maximize your investment in HP storage and networking with software that enables hardware-specific configuration, performance tuning and connectivity management. HP StoreVirtual VSA With HP StoreVirtual VSA you can use the power of virtualization to turn a set of heterogeneous and disconnected physical disk drives in your servers and storage devices into a single pool of logical storage capacity.
	NOTE: For more information available Storage Software including QuickSpecs, please see: www.hp.com/go/storage/software.
HP Insight Online	HP Insight Online is a new addition to the HP Support Center for one stop, secure access to product and HP support information personalized to your IT environment. Insight Online can automatically display devices remotely monitored by HP Insight Remote Support. With Insight Online's easy navigation you can efficiently track your IT support contracts and device status from anywhere and at anytime. www.hp.com/go/insightonline
HP Proactive Insight experience	Prevent problems with innovative, automated monitoring tools and proactive services. The HP Proactive Insight experience consist of using Insight Online, Insight Remote Support, and Proactive Care Support Service as one integrated solution. The Proactive Insight experience provides you with expert advice and personalized, cloud-based automated IT support, helping to prevent unplanned down time and solve problems quickly. For more information, visit: www.hp.com/go/proactiveinsightexperience
Factory Express Portfolio for Servers and Storage	HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.
	Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, HP 9000 servers as well as the MSAxxxx, VA7xxx, EVA, XP, rackable tape libraries and configurable network switches.
	For more information on Factory Express services for your specific server model please contact your sales representative or go to: http://www.hp.com/go/factory-express
HP Simple Configurate	or The HP eConfigure Enterprise Configurator now provides factory default racking for our HP hardware portfolio. This approach is aligned with our strategic direction to meet the needs and expectations of our valued customers. If you require "custom" rack configuration, please contact



please visit: http://www.hp.com/products/configurator

HP's Customer Business Center or an Authorized Partner for assistance. For additional information

Service and Support

Service and Support HP Technology Services for Industry Standard Servers and BladeSystem

Capitalizing on HP ProLiant server and HP BladeSystem capabilities requires a service partner who understands your increasingly complex business technology environment. That's why it makes sense to team up with the people who know HP infrastructure hardware and software best - the experienced professionals at HP Services.

What HP ProLiant and BladeSystem Services can do for you

HP ProLiant and BladeSystem Services can help you design, deploy, test, integrate, support, and manage IT and infrastructure solutions. This way, HP proposes services solutions that include more than just uplift of base warranty. Foundation Care services deliver scalable support-packages for HP industry-standard servers and software. You can choose the type and level of service that is most suitable for their business needs. If you are running business critical environments, HP offers Proactive Care or Critical Advantage. These services help deliver high levels of application availability through proactive service management and advanced technical response You can get the support you need by choosing from one of a number of service packaged solutions

we have designed to address wider set of customer support needs.

HP Technology Services meets business challenges with services offered in three support recommendations - **Optimized Care, Standard Care, and Basic Care** - available for each product group. Such support solutions enable customers to optimize technology operations, minimize risk and drive better business outcomes with easy-to-buy, easy-to-use scalable support recommendations for servers, storage, networking and software.

All three service recommendations include support services from the broader portfolio of Foundation Care and Proactive Care services.

Optimized Care Optimized Care: Supports maintaining servers at optimum performance availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

HP Installation and Startup for Insight Control Software / HP SIM

Provides for the deployment and basic configuration of HP Insight Control or HP SIM (Systems Insight Manager) on HP ProLiant ML and DL series servers or HP BladeSystem servers http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf

3-Year HP 24x7 4 hour Response, Proactive Care

Helps optimize your systems and delivers high levels of application availability through proactive service management and advanced technical response. A skilled Technical Manager will own your query or issue end to end until resolved, delivering a single point of contact for you

Additional Services: Factory Express, Education Services, Proactive Select - 30 Credits

Standard Care

Standard Care: Service recommendation that maintains high level of server availability

HP ProLiant Server Hardware Installation

Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf

HP Installation and Startup for Insight Control Software / HP SIM

Provides for the deployment and basic configuration of HP Insight Control or HP SIM (Systems



Service and Support	
	Insight Manager) on HP ProLiant ML and DL series servers or HP BladeSystem servers http://h20195.www2.hp.com/v2/GetPDF.aspx/4AA0-9972ENW.pdf
	3 Year HP Proactive Care Next Business Day This services combines next-business-day onsite hardware reactive support with proactive services and enhanced access to call specialists to manage and prevent problems.
	Additional Services: Software support service with 24X7 availability with a 2 hour response, Training courses on Microsoft, Linux (Red Hat and SUSE), VMware, and HP Insight Software, 10 Proactive Select Credits, Factory Express http://www8.hp.com/us/en/business-services/it-services.html?compURI=1078865
Basic Care	Basic Care: delivers minimum recommended support service level
	HP ProLiant Server Hardware Installation Provides for the basic hardware installation of HP branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf
	3-Year HP 24x7 4 hour Response, Hardware Support Onsite Service Provides you with rapid remote support and if required an HP authorized representative who will arrive on site any time and day of the year to begin hardware maintenance service within 4 hours of the service request being logged.
	http://h20195.www2.hp.com/V2/GetPDF.aspx/5982-6547EEE.pdf
	Additional Services: Factory Express, Education Services, Proactive Select - 10 Credits
Insight Remote Support	Provides 24 X 7 remote monitoring, proactive notifications, and problem resolution. Learn more http://www.hp.com/go/insightremotesupport
HP Support Center	Personalized online support portal with access to information, tools and experts to support HP business products. Submit support cases online, chat with HP experts, access support resources or collaborate with peers. Learn more http://www.hp.com/go/hpsc
	HP's Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HP Insight Remote Support and HP Support Center are available at no additional cost with a HP warranty, HP Care Pack or HP contractual support agreement.
	*HP Support Center Mobile App is subject to local availability
Warranty / Service Coverage	For ProLiant servers and storage systems, the services cover HP-branded hardware options qualified for the server, purchased at the same time or afterward, internal to the enclosure, as well as external monitors up to 22" and tower UPS products; these items will be covered at the same service level and for the same coverage period as the server unless the maximum supported lifetime and/or the maximum usage limitation has been exceeded. Coverage of the UPS battery is not included; standard warranty terms and conditions apply.
	The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by HP due to malfunction. It does not apply to any exchange of Disk or SSD/Flash Drives that have not failed. SSD/Flash Drives that are specified by HP as consumable parts and/or that have exceeded maximum supported lifetime and/or the maximum usage limit as set forth in the manufacturer's operating manual or the technical data sheet are not eligible for the defective media retention service feature option.
For more information	To learn more on HP ProLiant servers and HP BladeSystem servers, please contact your HP sales representative or HP Authorized Channel Partner. Or visit: http://www.hp.com/services/proliant



Service and Support

NOTE: For the Standard Features shipped in the "Factory Integrated Models", please see the "Configuration Information - Factory Integrated Models" section.

NOTE: Pre-configured models ship with the configurations below. Options can be selected from the Core or Additional options section of this QuickSpecs.

NOTE: HP does not allow factory integration of options into pre-configured models. Any additional options purchased will be shipped separately.

NOTE: If you desire a custom configuration please see "Configuration Information - Factory Integrated Models" section of this QuickSpecs.

NOTE: Maximum speed supported depends on the CPU installed.

Please see Memory Population Table or the Online Memory Configuration Tool at: www.hp.com/go/ddr3memory-configurator. **NOTE:** All Pre-configured Models come populated with some hard drive blanks installed. Should the customer need additional hard drive blanks, they can order more using either P/N 666987-B21: HP SFF Gen8 Hard Drive Blank Kit or P/N 666986-B21: HP LFF Gen8 Hard Drive Blank Kit.

NOTE: Not all models are available in all regions. Check with your local country HP offices for availability.

Entry Models

Processor(s)	(1) Intel® Pentium® G2020 (2.9GHz/2-core/3MB/55W) Processor
Cache Memory	3MB (1 x 3MB) L3 cache
Memory	2GB (1 x 2GB) PC3-12800E DDR3 UDIMM
Network Controller	HP Ethernet 1Gb 2-port 330i Adapter
Storage Controller	HP Dynamic Smart Array B120i Controller
Hard Drive	None ship standard
Internal Storage	4 LFF NHP SAS/SATA HDD cage; includes 4 LFF hard drive blanks
Optical Drive	None ship standard
Power Supply	HP 350W Multi-Output Power Supply NOTE: The standard power supply for the Entry Model is an 85% efficient Multi-Output Power Supply. It is a non-redundant, not-hot-plug power supply.
Fans	One (1) Non-redundant system fan ships standard One (1) Non-redundant PCIe fan ships standard
Management	HP iLO Management Engine (standard on shared system NIC) Optional: HP Insight Control
Form Factor	Micro ATX Tower (4U)
Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response (3-1-1 warranty offered in Brazil only).
	Cache Memory Memory Network Controller Storage Controller Hard Drive Internal Storage Optical Drive Power Supply Fans Management Form Factor



Pre-configured Models

HP ProLiant ML310e Gen8 i3-3220 1P 2GB-U Non-hot Plug LFF 350W PS Entry Server 674785-xx1	Processor(s) Cache Memory Memory Network Controller Storage Controller Hard Drive Internal Storage Optical Drive Power Supply	 (1) Intel® Core® i3-3220 (3.3GHz/2-core/3MB/65W, HT) Processor 3MB (1 x 3MB) L3 cache 2GB (1 x 2GB) PC3-12800E DDR3 UDIMM HP Ethernet 1Gb 2-port 330i Adapter HP Dynamic Smart Array B120i Controller 1x500GB NHP LFF SATA 4 LFF NHP SAS/SATA HDD cage; includes 3 LFF hard drive blanks HP Half-Height 16x SATA DVD-ROM HP 350W Multi-Output Power Supply NOTE: The standard power supply for the Entry Model is an 85% efficient Multi-Output Power Supply. It is a non-redundant, not-hot-plug power supply.
	Fans	One (1) Non-redundant system fan ships standard One (1) Non-redundant PCIe fan ships standard
	Management	HP iLO Management Engine (standard on shared system NIC) Optional: HP Insight Control
	Form Factor	Micro ATX Tower (4U)
	Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response (3-1-1 warranty offered in Brazil only).

Country Code Key

Tower Code Key

xx=00	US
xx=01	Australia
xx=03	UK
xx=04	Germany
xx=05	France
xx=37	APD
xx=42	Europe
xx=AA	PRC



Configuration Information - Factory Integrated Models

configurations are ordered representative for information NOTE: Factory Integrate NOTE: FIO indicates that	some of the steps required to configure a Factory Integrated Model. To ensure only va ed, HP recommends the use of an HP approved configurator. Contact your local sales ation on configurable product offerings and requirements. d Models must start with a CTO Server. t this option is only available as a factory installable option. ated Models will be populated with sufficient hard drive blanks based on the number o erver.	
Step 1: Base Co	nfiguration (choose one of the following configurable mo	dels)
HP Models	HP ProLiant ML310e Gen8 Hot Plug 4 LFF Configure-to-order Server	, 675241-B21
	Factory Integrated Model ships with:	
	HP Ethernet 1Gb 2-port 330i Adapter HP iLO Management Engine (standard on shared system NIC) HP Dynamic Smart Array B120i Controller (RAID 0/1/10) 4 ports for HDD NOTE: For set up instructions for HP Dynamic Smart Array B120i Controller please refer to the HP ProLiant ML300 series server user guide. NOTE: For general information about HP Dynamic Smart Array B120i Controller, please visit: http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/ smartarrayb120i/index.html Hot-Plug SAS/SATA 4 port cable PCA Power Cord Micro ATX Tower (4U)	
		675040 D01
	HP ProLiant ML310e Gen8 Hot Plug 8 SFF Configure-to-order Server	675242-B21
	Factory Integrated Model ships with: HP Ethernet 1Gb 2-port 330i Adapter HP iLO Management Engine (standard on shared system NIC) Standup HP Smart Array Controller or Host Bus Adapter required PCA Power Cord Micro ATX Tower (4U)	
	HP ProLiant ML310e Gen8 Non-hot Plug 4 LFF Configure-to-order Server	675240-B21
	Factory Integrated Model ships with:	
	HP Ethernet 1Gb 2-port 330i Adapter HP iLO Management Engine (standard on shared system NIC) HP Dynamic Smart Array B120i Controller (RAID 0/1/10) 4 ports for HDD NOTE: For set up instructions for HP Dynamic Smart Array B120i Controller please refer to the HP ProLiant ML300 series server user guide NOTE: For general information about HP Dynamic Smart Array B120i Controller, please visit: http://h18004.www1.hp.com/products/servers/proliantstorage/arraycontrollers/ smartarrayb120i/index.html Nonhot-plug SAS/SATA 4 port cable PCA Power Cord Micro ATX Tower (4U)	

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)



Configuration Information - Factory Integrated Models

HP Processors	Entry Processors	
	NOTE: Intel® Celeron® G540 supports up to 1066MHz DDR3 memory speed.	
	Intel® Celeron® G1610 and G1620 and Intel® Pentium® G860and G2020	
	support up to 1333 MHz DDR3 memory speed. Celeron G540 processor, performance for 1600MHz memory is clocked down to 1066MHz. Celeron	
	G1610, G1620 and Pentium G860 and G2020 processors, performance for	
	1600MHz memory is clocked down to 1333MHz.	
	HP ML310e Gen8 Intel® Celeron G1610 (2.6GHz/2-core/2MB/55W) FIO	721960-L21
	Processor Kit	704050 1 04
	HP ML310e Gen8 Intel® Celeron G1620 (2.7GHz/2-core/2MB/55W) FIO Processor Kit	721958-L21
	HP ML310e Gen8 Intel® Pentium® G2020 (2.9GHz/2-core/3MB/55W) FIO Processor Kit	721962-L21
	HP ML310e Gen8 Intel® Pentium® G2120 (3.1GHz/2-core/3MB/55W) FIO Processor Kit	703746-L21
	HP ML310e Gen8 Intel® Pentium® G2130 (3.2GHz/2-core/3MB/55W) FIO Processor Kit	721956-L21
	Base Processors	
	NOTE: All support up to 1600MHz DDR3 memory speeds.	
	HP ML310e Gen8 Intel® Core™ i3-3220 (3.3GHz/2-core/3MB/55W) FIO Processor Kit	700582-L21
	HP ML310e Gen8 Intel® Core™ i3-3240 (3.4GHz/2-core/3MB/55W) FIO Processor Kit	700580-L21
HP Memory	Unbuffered with ECC DIMMs (UDIMM) for E5-2xxx and E3-1xxx v3 series Processors	
	HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669320-B21
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647905-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669322-B21
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647907-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669324-B21
	HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647909-B21
	NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator.	
HP Power Supplies	 NOTE: Mixing of power supplies in the same server is not supported. All power supplies inside a server must be exactly the same model. Mixing Gold, Platinum, and Platinum Plus certified power supplies is not supported. NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: 	
	www.hp.com/go/hppoweradvisor	
	HP 350W Factory Integrated Power Supply Kit	674838-B21



Configuration Information - Factory Integrated Models

	HP Common Slot Gold Power Supplies NOTE: The following Power Supplies offer 92% Efficiency.	
	HP 460W Common Slot Gold Hot Plug Power Supply Kit	503296-B21
	Enablement Kit	
	HP 4U Redundant Power Supply Enablement Kit NOTE: The HP 4U Redundant Power Supply Enablement Kit (675843-B21) must be installed when using HP Common Slot power supplies.	675843-B21
Step 3: Choose	Additional Factory Integratable Options	
HP Insight Software	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle Single	C6N36A

Server FIO License HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL-bundle FIO C6N36ABE Electronic License **NOTE:** The Electronic software license is available in EMEA only.

Step 4: Choose Additional Options for Factory Integration

NOTE: For additional options, please refer to the "Core Options" and "Additional Options" section below.



Core Options

HP Unique Options	nay not be integrated at the factory. Contact your local sales representative for additional in HP 4U 4 Large Form Factor Hot Plug Hard Drive Backplane Kit NOTE: The LFF Kit is a backplane kit designed for going from NHP LFF to hot- plug LFF.		
	HP 4U 8 Small Form Factor Hot Plug Hard Drive Cage Kit NOTE: The SFF Kit is the cage plus backplane and designed to convert from any LFF configuration to SFF.	674841-B21	
HP Memory	NOTE: To realize the performance memory capabilities listed in this document, HP SmartMemory is required. For additional information, please see the HP SmartMemory QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/14225_div/14225_div.html (Worldwide)		
	Unbuffered with ECC DIMMs (UDIMM) for E5-2xxx and E3-1xxx v3 series Processors		
	HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669320-B2 ⁻	
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647905-B2 ²	
	HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669322-B2 ²	
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647907-B2 ⁻	
	HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669324-B2 ²	
	HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647909-B2 ²	
HP Drive Cage Options	HP 4U 4 Large Form Factor Hot Plug Hard Drive Backplane Kit NOTE: The LFF Kit is a backplane kit designed for going from NHP LFF to hot- plug LFF.	674839-B21	
	HP 4U 8 Small Form Factor Hot Plug Hard Drive Cage Kit NOTE: The SFF Kit is the cage plus backplane and designed to convert from any LFF configuration to SFF.	674841-B2 ⁻	
HP Optical Drives	HP Half-Height SATA DVD ROM JackBlack Optical Drive	624189-B2 ²	
	HP Half-Height SATA DVD RW JackBlack Optical Drive	624192-B2 ²	
HP Hard Drives	 NOTE: The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components. NOTE: Hard drives have either a one year or three year warranty; refer to the specific hard drive QuickSpecs for details. SAS Hot Plug with SmartDrive SFF (2.5-inch) Enterprise Drives 		



Core Options

HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive	718162-B21
HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	697574-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard	652589-B21
Drive	052505-021
HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652583-B21
HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard	652572-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652564-B21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652611-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21
SAS Hot Plug SmartDrive SFF (2.5-inch) Midline Drives	
HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652749-B21
HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652745-B21
SAS Hot Plug SmartDrive LFF (3.5-inch) Enterprise Drives	
HP 600GB 6G SAS 15K rpm LFF (3.5-inch) SC Enterprise 3yr Warranty Hard Drive	652620-B21
HP 450GB 6G SAS 15K rpm LFF (3.5-inch) SC Enterprise 3yr Warranty Hard	652615-B21
Drive	
SAS Hot Plug SmartDrive LFF (3.5-inch) Midline Drives	
HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	695510-B21
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B21
HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652757-B21
SAS Non-Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives	
HP 600GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	516830-B21
HP 450GB 6G SAS 15K rpm LFF (3.5-inch) Non-hot Plug Dual Port Enterprise 3yr Warranty Hard Drive	516826-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/12244_div/12244_div.html (Worldwide)	
6G SATA Hot Plug with SmartDrive SFF (2.5-inch) Midline (MDL) Drives	
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655710-B21
HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655708-B21
6G SATA Hot Plug with SmartDrive LFF (3.5-inch) Midline (MDL) Drives	000100-021
HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	693687-B21
HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	628061-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658079-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	657750-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658071-B21
6G SATA Non-hot Plug LFF (3.5-inch) Midline (MDL) Drives	



Core Options

HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	628065-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659339-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659337-B21
HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659341-B21
NOTE: SATA hard drives have a 1-year warranty. Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/13021_div/13021_div.html (Worldwide)	
6G SATA Value Endurance Hot Plug LFF (3.5-inch) Enterprise Boot Solid State Drives	
HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	718171-B21
HP 80GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Boot 3yr Wty Solid State Drive	734362-B21
6G SATA Value Endurance Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives	
HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	739898-B21
HP 300GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	739888-B21
6G SATA Value Endurance Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives	
HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718189-B21
HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718183-B21
HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Enterprise Value 3yr Wty Solid State Drive	718177-B21
6G SATA ME Hot Plug SFF (2.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691868-B21
HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691866-B21
HP 200GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691864-B21
HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691862-B21
6G SATA ME Hot Plug LFF (3.5-inch) Enterprise Mainstream Solid State Drives	
HP 800GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691860-B21
HP 400GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691856-B21



Core Options		
	HP 200GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691854-B21
	HP 100GB 6G SATA Mainstream Endurance LFF 3.5-in SC Enterprise Mainstream 3yr Wty Solid State Drive	691852-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14038_div/14038_div.html (Worldwide)	
	Hard Drive Kits NOTE: All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server. NOTE: The part numbers for single HDD blanks below are provided should the customer require replacement HDD blanks for their server	
	HP LFF Gen8 Hard Drive Blank Kit	666986-B21
	HP SFF Gen8 Hard Drive Blank Kit	666987-B21
HP Networking	Gigabit Ethernet adapters	
	HP NC112T PCI Express Gigabit Server Adapter	503746-B21
	HP NC365T 4-port Ethernet Server Adapter	593722-B21
	HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
	HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
	HP Ethernet 1Gb 2-port 361T Adapter	652497-B21
	10 Gigabit Ethernet adapters	
	HP NC523SFP 10Gb 2-port Server Adapter	593717-B21
	HP NC552SFP 10Gb 2-port Ethernet Server Adapter	614203-B21
	HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information: www.hp.com/go/ProLiantNICs	
HP Power Supplies	 NOTE: Mixing of power supplies in the same server is not supported. All power supplies inside a server must be exactly the same model. Mixing Gold, Platinum, and Platinum Plus certified power supplies is not supported. NOTE: Prior to making a power supply selection it is highly recommended that the HP Power Advisor is run to determine the right size power supply for your server configuration. The HP Power Advisor is located at: www.hp.com/go/hppoweradvisor. 	
	HP Common Slot Gold Power Supplies NOTE: The following Power Supplies offer 92% Efficiency.	
	HP 460W Common Slot Gold Hot Plug Power Supply Kit	503296-B21
	NOTE: Option Kits for AC power supplies include the power supply and one PDU IEC cable. NOTE: Power Specification and Technical Content for supported power supplies can be found at:	
	http://h18000.www1.hp.com/products/quickspecs/14209_div/14209_div.html	
	Enablement Kit	



Core Options

HP 4U Redundant Power Supply Enablement Kit **NOTE:** The HP 4U Redundant Power Supply Enablement Kit (675843-B21) must be installed when using HP Common Slot power supplies.

675843-B21



Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, HP recommends the use of an HP approved configurator. Contact your local sales representative for additional information.

HP Management Hardware	HP Dedicated iLO Management Port Kit	674845-B21
HP Insight Software	HP Insight Control	
	HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License	C6N27A
	HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License NOTE: The Electronic software license is available in EMEA only.	C6N28ABE
	HP Insight Control Server Provisioning Media Kit	BD883A
	HP Insight Management Media Kit	C6N31A
	HP Insight Control Server Deployment including 1yr 24x7 Support Electronic License	T9082AAE
	HP Insight Control Server Deployment including 1yr 24x7 Support Single Server License	452151-B21
	Electronic and Flexible-Quantity licenses can be used to purchase multiple licenses with a single activation key.	
	NOTE: Customer will receive a license entitlement certificate. The license entitlement certificate must be redeemed online or via fax in order to obtain the license activation key(s). Includes one year of 24 x 7 HP Software Technical Support and Update Service.	
	NOTE: Licenses ship without media. The HP Insight Management Media Kit can be ordered separately, or can be downloaded at: http://www.hp.com/go/insightupdates.	
	NOTE: For additional license options please see the QuickSpecs at: http://h18000.www1.hp.com/products/quickspecs/12631_div/12631_div.html	
	HP Integrated Lights-Out (iLO)	
	HP iLO Essentials	
	HP Integrated Lights-Out Essentials including 3yr 24x7 Technical Support and Updates E-LTU NOTE: The Electronic software license is available in EMEA only.	E6U61ABE
	HP Integrated Lights-Out Essentials including 1yr 24x7 Technical Support and Updates E-LTU NOTE: The Electronic software license is available in EMEA only.	E6U62ABE
	HP Integrated Lights-Out Essentials including 3yr 24x7 Tech Support and Updates Single Svr License	BD774A
	HP Integrated Lights-Out Essentials including 1yr 24x7 Tech Support and Updates Single Svr License	BD775A
	HP Integrated Lights-Out (iLO) Advanced for ProLiant	
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU NOTE: The Electronic software license is available in EMEA only.	E6U59ABE
	HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU NOTE: The Electronic software license is available in EMEA only.	E6U64ABE
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21



HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A
HP iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity License	512486-B21
HP iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking License	512487-B21
NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at:	
http://h18004.www1.hp.com/products/quickspecs/14276_div/14276_div.html NOTE: For more information, visit: http://www.hp.com/go/ilo.	
HP Trusted Platform Module Option	488069-B21
securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/go/TPM. NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment. NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss.	
-	631667-B21
HP Smart Array P420 Controller	
HP Smart Array P420/2GB FBWC 6Gb 2-ports Int SAS Controller	631671-B21
HP Smart Array P420/1GB FBWC 6Gb 2-ports Int SAS Controller	631670-B21
HP Smart Array P421 Controller	
HP Smart Array P421/2GB FBWC 6Gb 2-ports Ext SAS Controller	631674-B21
	631673-B21
	631681-B21
-	D7S26A
	D7S27A
	D7S27AAE
NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14227_div/14227_div.html	
http://h18000.www1.hp.com/products/quickspecs/14228_div/14228_div.html (Smart Array P420 Controller)	
http://h18000.www1.hp.com/products/quickspecs/14229_div/14229_div.html	
	 HP iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity License HP iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking License NOTE: For additional license kits, including electronic delivery options, please see the QuickSpecs at: http://h18004.www1.hp.com/products/quickspecs/14276_div/14276_div.html NOTE: The Tomore information, visit: http://www.hp.com/go/ilo. HP Trusted Platform Module Option NOTE: The TPM (Trusted Platform Module) is a microcontroller chip that can securely store artifacts used to authenticate the server platform. These artifacts can include passwords, certificates and encryption keys. Windows® BitLocker™ Drive Encryption (BitLocker) is a data protection feature available in Windows Server® 2008. BitLocker leverages the enhanced security capabilities of a Trusted Platform Module (TPM) version 1.2. The TPM works with BitLocker to help protect user data and to ensure that a server running Windows Server 2008 has not been tampered with while the system was offline. For more information about TPM, including a white paper, go to: www.hp.com/gO/TPM. NOTE: ProLiant OS pre-installed units will come with the partition required for TPM deployment. NOTE: The TPM key is unique to every TPM deployed server and must be retained. Misplacing or losing the key could result in data loss. SAS Controllers HP Smart Array P222/512 FBWC 6Gb 2-ports Int SAS Controller HP Smart Array P420/COB FBWC 6Gb 2-ports Ext SAS Controller HP Smart Array P421/20B FBWC 6Gb 2-ports Ext SAS Controller HP Smart Array P421/10B FBWC 6Gb 2-ports Ext SAS Controller HP Smart Array P421/10B FBWC 6Gb 2-ports Ext SAS Controller HP Smart Array P421/10B FBWC 6Gb 2-ports Ext SAS Controller HP Smart Array P421/10B FBWC 6Gb 2-ports Ext SAS Controller HP Smart Array P42



http://h18000.www1.hp.com/products/quickspecs/13200 div/13200 div.html	
(Smart Array Advanced Pack)	
HP Host Bus Adapters	
HP H220 Host Bus Adapter	650933-B21
HP H221 Host Bus Adapter	650931-B21
HP H221 PCIe 3.0 SAS Host Bus Adapter	729552-B21
HP H222 Host Bus Adapter	650926-B21
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18004.www1.hp.com/products/quickspecs/14336_div/14336_div.html (HBA H220)	
http://h18004.www1.hp.com/products/quickspecs/14222_div/14222_div.html	
http://h18004.www1.hp.com/products/quickspecs/14337_div/14337_div.html (HBA H222)	
SCSI HBA	
HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter	412911-B21
NOTE: Please see the following QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html (SC11Xe HBA)	
NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape. For hardware and software compatibility of HP tape backup products see:	
•	C0L99A
	EH963A
•	EH964A
	EH969A
· ·	EH970A
HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader	C0H19A
HP StoreEver MSL6480	
HP StoreEver MSL6480 Scalable Base Module	QU625A
NOTE: Please see the QuickSpecs for Technical Specifications and additional	
information:	
http://h18000.www1.hp.com/products/quickspecs/14604_div/14604_div.html (Worldwide)	
	 HP Host Bus Adapters HP H220 Host Bus Adapter HP H221 Host Bus Adapter HP H221 PCIe 3.0 SAS Host Bus Adapter HP H221 PCIe 3.0 SAS Host Bus Adapter HP H222 Host Bus Adapter NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18004.www1.hp.com/products/quickspecs/14336_div/14336_div.html (HBA H220) http://h18004.www1.hp.com/products/quickspecs/14222_div/14222_div.html (HBA H221) http://h18004.www1.hp.com/products/quickspecs/14337_div/14337_div.html (HBA H222) SCSI HBA HP SC11Xe Ultra320 Single Channel/ PCIe x4 SCSI Host Bus Adapter NOTE: Please see the following QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/12566_div/12566_div.html (SC11Xe HBA) NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/groducts/quickspecs/12566_div/12566_div.html (SC11Xe HBA) NOTE: For the complete range of tape drives, autoloaders, libraries and media see: http://www.hp.com/go/tape. For hardware and software compatibility of HP tape backup products see: http://www.hp.com/storage/SPOCK and www.hp.com/go/ebs. HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive HP StoreEver LTO-6 Ultrium 6250 Internal Tape Drive HP StoreEver LTO-6 Ultrium 6250 External Tape Drive HP StoreEver 1/8 G2 LTO-6 Ultrium 6250 FC Tape Autoloader HP StoreEver MSL6480 Kalabe Base Module NOTE: Please see the QuickSpecs for Technical Specifications and additional information: http://h18000.www1.hp.com/products/quickspecs/14604_div/14604_div.html



Additional Options						
HP Disk Backup	NOTE: For the complete range of RDX drives and media see: http://www.hp.com/go/rdx. For hardware and software compatibility of HP disk backup products see: http://www.hp.com/storage/SPOCK. HP RDX Removable Disk Backup System					
	HP RDX320 USB3.0 External Disk Backup System	B7B63A				
	HP RDX500 USB3.0 Internal Disk Backup System	B7B64A				
	HP RDX500 USB3.0 External Disk Backup System	B7B66A				
	HP RDX1000 USB3.0 Internal Disk Backup System	B7B67A				
	HP RDX1000 USB3.0 External Disk Backup System	B7B69A				
	NOTE: Please see the QuickSpecs for additional part numbers, Technical Specifications, and additional information: http://h18000.www1.hp.com/products/quickspecs/13036_div/13036_div.html (Worldwide)					
HP Disk Storage	Disk Enclosures					
Systems	HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB Bundle	E7W32A				
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:					
	http://h18000.www1.hp.com/products/quickspecs/13404_div/13404_div.html (Worldwide)					
HP Uninterruptible	HP Tower UPS					
Power Systems	HP T1500 G3 UPS Models					
	HP T1500 G3 1400VA INTL Tower Uninterruptible Power System	AF451A				
	HP T1500 G3 1400VA NA Tower Uninterruptible Power System	AF450A				
	HP T1500J JP Uninterruptible Power System	AF458A				
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/13160_div/13160_div.html (Worldwide)					
	HP Rack-mountable UPS					
	HP R1500 G3 Uninterruptible Power Supply (UPS)					
	HP R1.5kVA G3 1U NA Uninterruptible Power System	AF469A				
	HP R1.5kVA G3 1U JP/TW Uninterruptible Power System	AF470A				
	HP R1.5kVA G3 1U INTL Uninterruptible Power System	AF471A				
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14059_div/14059_div.html (Worldwide)					
	HP R/T3000 G2 Uninterruptible Power System (UPS)					
	HP R/T3000 G2 2U L530 Low Voltage NA/JP Uninterruptible Power System	AF466A				
	HP R/T3000 G2 2U L620 High Voltage NA/JP Uninterruptible Power System	AF467A				
	HP R/T3000 G2 2U Detachable Cord High Voltage INTL Uninterruptible Power A System					
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14058_div/14058_div.html (Worldwide)					



Additional Options		
	R5000 Uninterruptible Power System (UPS)	
	HP R5KVA 3U IEC309-32A High Voltage INTL Uninterruptible Power System	AF461A
	HP R5KVA 3U L630 High Voltage NA/JP Uninterruptible Power System	AF460A
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14109_div/14109_div.html (Worldwide)	
	R7000 Uninterruptible Power System (UPS)	
	HP R7KVA 4U 50A High Voltage NA/JP Uninterruptible Power System	AF462/
	HP R7KVA 4U IEC-32A High Voltage INTL Uninterruptible Power System	AF463/
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14110_div/14110_div.html (Worldwide)	
	NOTE: For additional information on HP Uninterruptible Power Systems please go to: www.hp.com/servers/rackups.	
	NOTE: For additional information on sizing your server, please reference: http://www.upssizer.com.	
	NOTE: Please see the UPS and PDU cable matrix's on the HP Power Protection and Management page. Under Power Cords, click on the "HP Power Cord Matrix" link. That link will list cable descriptions, requirements, and specifications for UPS and PDU units. Please see the following link: www.hp.com/products/powercords.	
HP Basic Power	HP Basic Power Distribution Unit: 1U/0U Version	
Distribution Units	HP 1.9kVA 120 Volt L5-20 Input (12xNEMA 5-20R) NA/JP Basic PDU	H5M54/
(pPDU)	HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Basic PDU	H5M56/
	HP Basic Power Distribution Unit: Half Height Version	
	HP 2.8kVA 120 Volt L5-30 Input (18xNEMA 5-20R) NA/JP Basic PDU	H5M55
	HP 3.6kVA 200-240 Volt Detachable C20 Input (18xC13) WW Basic PDU	H5M57
	HP 4.9kVA 208 Volt L6-30 Input (20xC13) NA/JP Basic PDU	H5M58
	HP 7.3kVA 230 Volt IEC309 32A Input (20xC13) INTL Basic PDU	H5M68
	HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13) NA/JP Basic PDU	H5M61
	HP Basic Power Distribution Unit: Mid Height Version	
	HP 4.9kVA 208 Volt L6-30 Input (24xC13/6xC19) NA/JP Basic PDU	H5M59
	HP 7.3kVA 230 Volt IEC309 32A Input (24xC13/6xC19) INTL Basic PDU	H5M70
	HP 8.3kVA 208 Volt CS8265C Input (30xC13/6xC19) NA/JP Basic PDU	H5M60
	HP 11kVA 230 Volt IEC309 63A Input (30xC13/6xC19) INTL Basic PDU	H5M71
	HP Hardwired 200-240 Volt Input (30xC13/6xC19) WW Basic PDU	H5M75
	HP 5.7kVA 208 Volt L21-20 3-Phase Input (24xC13/3xNEMA 5-20R) NA/JP Basic PDU	H5M63
	HP 8.6kVA 208 Volt L21-30 3-Phase Input (24xC13/3xC19/3xNEMA 5-20R) NA/JP Basic PDU	H5M64
	HP 8.6kVA 208 Volt L15-30 3-Phase Input (24xC13/6xC19) NA/JP Basic PDU	H5M62
	HP 11kVA 400 Volt IEC309 16A 3-Phase Input (30xC13/6xC19) INTL Basic PDU	H5M72
	HP Basic Power Distribution Unit: Full Height Version	
	HP 11kVA 400 Volt IEC309 16A 3-Phase Input (36xC13/6xC19) INTL Basic PDU	H5M73
	HP 11kVA 400 Volt IEC309 30A 3-Phase Input (36xC13/6xC19) NA Basic PDU	H5M67

Additional Options		
	HP Basic Power Distribution Unit: 480/277 Volt Version	
	HP 13.2kVA 480 Volt IEC309 30A 3-Phase Input (15 Outlet) NA Basic PDU	H3X07A
	HP 19.9kVA 480 Volt IEC309 30A 3-Phase Input (30 Outlet) NA Basic PDU	H3X08A
	HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer	H3X09A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/14557_div/14557_div.html (Worldwide)	
	NOTE: Additional HP Power Distribution Units are available. For a complete list of all HP PDUs and additional information please visit: www.hp.com/go/rackandpower.	
HP Remote Monitoring	HP Remote Monitored Power Distribution Unit: 1U Version	
Power Distribution	HP 2.8kVA 120 Volt L5-30 Input (12xNEMA 5-20R)NA/JP Monitored PDU	D9N43A
Units (mPDU)	HP 3.6kVA 200-240 Volt Detachable C20 Input (12xC13) WW Monitored PDU	D9N46A
	HP 4.9kVA 208 Volt L6-30 Input (12xC13) NA/JP Monitored PDU	D9N44A
	HP Remote Monitored Power Distribution Unit: Half Height Version	
	HP 3.6kVA 200-240 Volt Detachable C20 Input (16xC13) WW Monitored PDU	D9N45A
	HP Remote Monitored Power Distribution Unit: Mid Height Version	
	HP 4.9kVA 208 Volt L6-30 Input (20xC13/4xC19) NA/JP Monitored PDU	D9N47A
	HP 7.3kVA 230 Volt IEC309 32A Input (20xC13/4xC19) INTL Monitored PDU	D9N48A
	HP 8.6kVA 208 Volt L15-30 3-Phase Input (18xC13/3xC19) NA/JP Monitored PDU	D9N51A
	HP 5.7kVA 208 Volt L21-20 3-Phase Input (18xC13/3xNEMA 5-20R) NA/JP Monitored PDU	D9N52A
	HP 8.6kVA 208 Volt L21-30 3-Phase Input (20xC13/3xC19/3xNEMA 5-20R) NA/JP Monitored PDU	D9N53A
	HP 11kVA 400 Volt IEC309 16A 3-Phase Input (18xC13/3xC19) INTL Monitored PDU	D9N55A
	HP Remote Monitored Power Distribution Unit: Full Height Version	
	HP 8.3kVA 208 Volt CS8265C Input (30xC13/3xC19) NA Monitored PDU	D9N49A
	HP 7.3kVA 230 Volt IEC309 32A Input (32xC13/4xC19) INTL Monitored PDU	D9N50A
	HP 11kVA 400 Volt IEC309 16A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU	D9N57A
	HP 14.4kVA 208 Volt CS8365C 3-Phase Input (12xC13/12xC19)NA Monitored PDU	D9N58A
	HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (30xC13/3xC19) NA Monitored PDU	D9N61A
	HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (24xC13/3xC19) NA/JP Monitored PDU	D9N54A
	HP 17.3kVA 208 Volt IEC309 60A 3-Phase Input (12xC13/12xC19) NA/JP Monitored PDU	D9N59A
	HP 22kVA 400 Volt IEC309 32A 3-Phase Input (12xC13/12xC19) INTL Monitored PDU	D9N60A
	HP 22kVA 400 Volt IEC309 32A 3-Phase Input (30xC13/3xC19) INTL Monitored PDU	D9N56A



Additional Options		
	HP 16.6kVA 400 Volt IEC309 30A 3-Phase Input (12xC13/12xC19) NA Monitored PDU	D9N62A
	HP 19.9kVA 480 Volt 3-Phase (30 Outlet) NA Monitored PDU	D9N63A
	HP Environmental Sensor for Remote Monitored PDUs	
	HP Environmental Sensor for Remote Monitored PDUs	E2D53A
	NOTE: Please see the QuickSpecs for additional information: http://h18000.www1.hp.com/products/quickspecs/14669_div/14669_div.html (Worldwide)	
HP Intelligent Power	iPDU Core Units	
Distribution Units (iPDU)	HP 4.9kVA 24A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF520A
	HP 8.3kVA 40A Single Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF521A
	HP 8.6kVA 24A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF522A
	HP 14.4kVA 40A Three Phase NA/JP Intelligent Modular Power Distribution Unit	AF533A
	HP 17.3kVA 48A Three Phase NA/JP Core Intelligent Modular Power Distribution Unit	AF523A
	HP 17.3kVA 24A 415V Three Phase L22-30 NA Core Intelligent Power Distribution Unit	AF902A
	HP 7.3kVA 32A Single Phase INTL Core Intelligent Modular Power Distribution Unit	AF525A
	HP 11kVA 16A Three Phase INTL Core Intelligent Modular Power Distribution Unit	AF526A
	HP 22kVA 32A Three Phase INTL Core Intelligent Modular Power Distribution Unit	AF527A
	HP 17.3kVA 48A 208V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF535A
	HP 17.3kVA 24A 415V Three Phase 12 Outlet Core NA/JP Intelligent Power Distribution Unit	AF537A
	HP 22kVA 32A 400V Three Phase 12 Outlet Core INTL Intelligent Power Distribution Unit	AF538A
	iPDU Kits with Standard Extension Bars	
	HP 4.9kVA 24A Single Phase NA/JP Intelligent Modular Power Distribution Kit	AF531A
	HP 8.6kVA 24A Three Phase NA/JP Intelligent Modular Power Distribution Kit	AF532A
	HP 7.3kVA 32A Single Phase INTL Intelligent Modular Power Distribution Kit	AF534A
	iPDU Extension Bars	
	HP 5xC13 Intelligent PDU Extension Bar G2 Kit	AF547A
	HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension Bar	AF528A
	NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
	http://h18000.www1.hp.com/products/quickspecs/13650_div/13650_div.html (Worldwide) NOTE: Additional HP Power Distribution Units are available. For a complete list of	
	all HP PDUs and additional information please visit: www.hp.com/go/rackandpower.	



Additional Options					
HP Rack Series	HP Intelligent Series Rack				
	HP 636 1075mm Pallet Intelligent Series Rack	BW895A			
	HP 636 1075mm Shock Intelligent Series Rack	BW896A			
	HP 642 1075mm Pallet Intelligent Series Rack	BW903A			
	HP 642 1075mm Shock Intelligent Series Rack	BW904A			
	HP 647 1075mm Pallet Intelligent Series Rack	BW911A			
	HP 647 1075mm Shock Intelligent Series Rack	BW912A			
	NOTE: Please see the QuickSpecs for Technical Specifications such as height, width, depth, weight, and color: http://h18000.www1.hp.com/products/quickspecs/14223_div/14223_div.html				
	(Worldwide)				
	NOTE: For additional information regarding Rack Cabinets, please see the following URL: http://www.hp.com/go/rackandpower.				
HP Rack Options	HP Location Discovery Services				
	HP 36U Location Discovery Kit	BW945A			
	HP 42U Location Discovery Kit	BW946A			
	HP 47U Location Discovery Kit	BW947A			
	NOTE: Please see the QuickSpecs for Technical Specifications and additional				
	information: http://h18000.www1.hp.com/products/quickspecs/14429_div/14429_div.html				
	(Worldwide)				
	HP USB Keyboard and Mouse				
	HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21			
	HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-B21			
	HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-B21			
	HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-B21			
	HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-B21			
	HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-B21			
	HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-B21			
	HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-B21			
	HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-B21			
	HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-B21			
	HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D63			
	HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373			
	HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B33			
	HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133			
	HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143			
	HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223			
	HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353			
	HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103			
	HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113			
	HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-KD3			



Additional Options

NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/13792_div/13792_div.html (Worldwide)	
HP TFT7600 G2 KVM Console Rackmount Keyboard Monitor	
HP TFT7600 G2 KVM Console Rackmount Keyboard US Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard UK Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard DE Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard FR Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard IT Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard ES Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard DK Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard NO Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard SE/FI Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard CH Monitor	AZ87
HP TFT7600 G2 KVM Console Rackmount Keyboard PT Monitor	AZ88
HP TFT7600 G2 KVM Console Rackmount Keyboard BE Monitor	AZ88
HP TFT7600 G2 KVM Console Rackmount Keyboard JP Monitor	AZ88
HP TFT7600 G2 KVM Console Rackmount Keyboard RU Monitor	AZ88
HP TFT7600 G2 KVM Console Rackmount Keyboard Intl Monitor	AZ88
HP TFT7600 G2 KVM Console Rackmount Keyboard US TAA Monitor	AZ88
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/13731_div/13731_div.html (Worldwide)	
HP Server Console Switches	
HP Server Console 0x2x8 Port Analog Switch	AF61
HP Server Console 0x2x16 Port Analog Switch	AF61
HP TAA 0x2x16xKVM Server Console G2 Switch	AF62
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/11834_div/11834_div.html (Worldwide)	
HP Server Console Switch G2 with Virtual Media & CAC	
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC Software	AF61
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC Software	AF61
HP KVM CAT5 1-pack USB Interface Adapter	336047-E
NOTE: Please see the QuickSpecs for Technical Specifications and additional information:	
http://h18000.www1.hp.com/products/quickspecs/13475_div/13475_div.html (Worldwide)	
HP IP Console Switch G2 with Virtual Media & CAC	
HP 1x4 USB/PS2 KVM Console Switch	AF61
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC Software	AF62
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC Software	AF62



Additional Options		
	HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC Software NOTE: Please see the QuickSpecs for Technical Specifications and additional	AF622A
	information: http://h18000.www1.hp.com/products/quickspecs/13474_div/13474_div.html (Worldwide) Rack Kit	
	HP Tower to Rack Conversion Tray Universal Kit	417705-B21
HP USB and SD Options	HP Flash Media Kits for USB Drives	
	HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
	HP Enterprise Mainstream Flash Media Kits for Memory Cards	
	HP 8GB SD Enterprise Mainstream Flash Media Kit	726113-B21
	HP 32GB SD Enterprise Mainstream Flash Media Kit	700136-B21
	NOTE: Please see the QuickSpecs for Technical Specifications and additional	
	information: http://h18000.www1.hp.com/products/quickspecs/13971_div/13971_div.html	
HP Care Pack Services		
	NOTE: Collaborative Support plus Proactive services delivered by the onshore, local language Advanced Solution Center (ASC), end-to-end case ownership from a Technical Solution Specialists and Technical Account Manager who remotely delivers firmware/software revision management, proactive scans and incident trend reports. Recommended for customers running a virtualized infrastructure and/or customers who desire an enhanced call support experience.	
	HP 3 year 4 hour 24x7 ProLiant ML310e Proactive Care Service	U6F73E
	HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant ML310e Proactive Care Service	U6F74E
	HP 3 year 6 hour Call to Repair 24x7 ProLiant ML310e Proactive Care Service	U6F79E
	HP 3 year 6 hour Call to Repair 24x7 w/ Defective Media Retention ProLiant ML310e Proactive Care SVC	U6F80E
	Foundation Care	
	HP 3 year 4 hour 24x7 ProLiant ML310e Collaborative Support	U6F71E
	HP 3 year 4 hour 24x7 with Defective Media Retention ProLiant ML310e Collaborative Support	U6F72E
	HP 3 year 6 hour Call to Repair 24x7 ProLiant ML310e Collaborative Support	U6F77E
	HP 3 year 6 hour CalltoRepair 24x7 w/Defective Media Retention ProLiant ML310e Collaborative Support	U6F78E
	Proactive Care Personalized Support Option	
	NOTE: To add an onsite Account Support Manager (ASM) to Proactive Care. ASM is an assigned resource who delivers support planning and brings technical expertise and best practices advices for the customer's environment.	
	HP 3 year ISS ProactiveCare Personalized Support	U6W98E
	Installation Services NOTE: Reduce the time required to get your system up and running and help minimize disruptions to your business.	-
	HP Install ProLiant ML310e Service	U6G21E
		000212

Additional Options

HP Startup ProLiant ML310e Service **NOTE:** For more information, customer/resellers can contact: http://www.hp.com/services/carepack U6G23E



Memory

NOTE: Memory configurations listed do not apply to "Factory Integrated Models".

HP SmartMemory

New HP SmartMemory now provides additional protection for your servers. With HP Authentication it can verify that you have true HP Qualified Memory in your HP ProLiant Gen8 server. With HP SmartMemory your new HP ProLiant server can take advantage of additional Gen8 enhancements in performance, durability and future manageability support through HP Active Health System

DDR3 memory population guidelines

For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator

General Guidelines:

- The HP ProLiant ML310e Gen8 Server has four memory slots
- There are two channels per server with two DIMM slots per channel
- Memory channel 1 consists of the two (2) DIMMs that are closest to the processor
- Memory channel 2 consists of the two (2) DIMMs that are furthest from the processor
- Different types of processors have different types of memory support.
- Support for single/dual-rank 1333/1600 MT/s ECC UDIMM (unbuffered DIMMS)
- The server supports up to 32 GB (4 x 8-GB) for Unbuffered DIMMs
- No support for LRDIMMs; RDIMMs; Non-ECC UDIMMs
- Do not install DIMMs if the processor is not installed
- Populate DIMMs from heaviest load (double-rank) to lightest load (single-rank)
- Non-ECC DIMMs are not supported
- Always use HP qualified DIMMs

ML310e Gen8 Supported Memory Bandwidth and Capacity

DIMM Type	Unbuffered with ECC DIMMs (UDIMMs)					
DIMM Rank	Single F	Rank (1R) Dual Rank (2R)				
DIMM Capacity	2GB	2GB	4GB	4GB	8GB	8GB
DIMM Native Speed (MHz)	1333	1600	1333	1600	1333	1600
Voltage	LV	Std	LV	Std	LV	Std
SLOTS THAT CA	N BE POPULATE	D				·
4 slot servers	4	4	4	4	4	4
MAXIMUM CAPA	CITY (GB)*					
	8	8	16	16	32	32
POPULATED DIN	IM SPEED (MHz)			·	·	·
1 DIMM Per Channel	1333	1600	1333	1600	1333	1600
2 DIMM Per Channel	1333**	1600	1333**	1600	1333**	1600

NOTE: Memory speed is a function of the processor QPI bus speed. To realize the performance memory capabilities listed above HP SmartMemory is required.

* Maximum capacity will vary based on individual server platform qualification schedule

** For HP SmartMemory, UDIMM is supported at 2DPC@1333 at 1.35V. Third party memory may only support up to 2DPC@1066 at 1.5V.




Memory

Memory		Slot			
		DIMM1C	DIMM2A	DIMM3D	DIMM4B
Standard (Base Model)	2 GB	Empty	2 GB	Empty	Empty
Standard (Performance Model)	4 GB	Empty	4 GB	Empty	Empty
Maximum	32 GB	8 GB	8 GB	8 GB	8 GB

Memory Speed by Processor Model	
Processor Models	Supported Memory Speeds
E3-1220Lv2, E3-1220v2, E3-1230v2, E3-1240v2, E3-1270v2, E3-1280v2, i3-3240, i3-3220	1600/1333/1066MHz
G2120	1333/1066MHz
G540	1066MHz

NOTE: Capacity references are rounded to the common Gigabyte values.

- 2GB = 2048MB
- 4GB = 4096MB
- 8GB = 8192MB

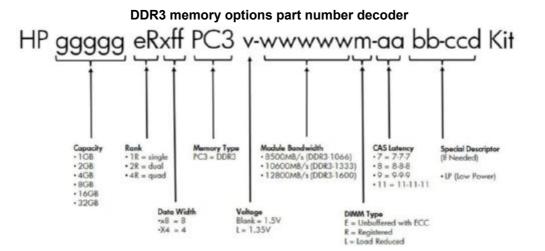

Following are memory options available from HP:

HP Memory	Unbuffered with ECC DIMMs (UDIMM) for E5-2xxx and E3-1xxx v3 series Processors				
	HP 2GB (1x2GB) Single Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669320-B21			
	HP 2GB (1x2GB) Single Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647905-B21			
	HP 4GB (1x4GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11 Memory Kit	669322-B21			
	HP 4GB (1x4GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 Low Voltage Memory Kit	647907-B21			



Memory

HP 8GB (1x8GB) Dual Rank x8 PC3-12800E (DDR3-1600) Unbuffered CAS-11669324-B21Memory Kit669324-B21


HP 8GB (1x8GB) Dual Rank x8 PC3L-10600E (DDR3-1333) Unbuffered CAS-9 647909-B21 Low Voltage Memory Kit

NOTE: All DDR3 memory option kits consist of one DIMM per kit. For detailed memory configuration rules and guidelines, please use the Online DDR3 Memory Configuration Tool: www.hp.com/go/ddr3memory-configurator.



Storage

1		•	
			Ĩ
100	. - (())	0.01	1
1000	234	567	8
0101	Î		0
- Day	9 8	14983	
1	1.0 K		1
128		1000	観シ。



External Storage

1 - 8	8 x 2.5" (SFF) SAS/SATA hard drive bays
A	Removable Optical Drive
В	Removable Optical Drive NOTE. Once Redundant Power Supply is installed, Bay A will be the only media bay available for use.
1 - 4	4 x 3.5" (LFF) SAS/SATA hard drive bays
A	Removable Optical Drive
В	Removable Optical Drive NOTE. Once Redundant Power Supply is installed, Bay A will be the only media bay available for use.

	Quantity Supported	Position Supported	Controller
D2600 Disk Enclosure	Up to 4	External	HP Smart Array P222/512MB FBWC Controller
	Up to 8	External	HP Smart Array P421/1GB FBWC Controller HP Smart Array P421/2GB FBWC Controller
D2700 Disk Enclosure	Up to 4	External	HP Smart Array P222/512MB FBWC Controller
	Up to 8	External	HP Smart Array P421/1GB FBWC Controller HP Smart Array P421/2GB FBWC Controller



Technical Specifications

System Unit	Tower Dimensions (H x W x D) (with feet/bezel)	14.5.x 6.89 x 18.71 in (36.82 x17.5 x 47.52 cm)		
	Tower Weight (approximate)	Maximum (all hard drives, power supplies, and processors installed)	41.8 lb (18.96 kg)	
		Minimum (one hard drive, power supply, and processor installed)	25.29 lb (11.47 kg)	
	Input Requirements	Rated Line Voltage	100 to 240 VAC	
	(per power supply)	Rated Input Current	7.1 Amps (at 120VAC) to 3.5 Amps (at 240 VAC)	
		Rated Input Frequency	50 to 60 Hz	
		Rated Input Power	486 W	
	BTU Rating	Maximum	460W - 1773 BTU / hr (at 120 VAC), 1715 (at 240 VAC)	
	Power Supply Output (per power supply)	Rated Steady-State Power	350 W (at 100 VAC), 350 W (at 200 VAC)	
		Maximum Peak Power	350 W (at 100 VAC), 350 W (at 200 VAC)	
	System Inlet Temperature	Operating	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0 °C per every 304.8 m (1.8 °F per every 1000 ft) above sea level to a maximum of 3048 m ($10,000$ ft), no direct sustained sunlight. Maximum rate of change is 10°C/hr (18 °F/hr). The upper limit may be limited by the type and number of options installed.	
			System performance may be reduced if operating with a fan fault or above 30°C (86°F).	
		Non-operating	-30° to 60°C (-22° to 140°F). Maximum rate of change is 20°C/hr (36°F/hr).	
	Relative Humidity (non-condensing)	Operating	10 to 90% relative humidity (Rh), 28°C (82.4°F) maximum wet bulb temperature, non-condensing.	
		Non-operating	5 to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature, non-condensing.	
	Altitude	Operating	3048 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min).	
		Non-operating	9144 m (30,000 ft). Maximum allowable altitude change rate is 457 m/min (1500 ft/min).	
	Acoustic Noise	Listed are the declared A	-Weighted sound power levels (LWAd) and	

Technical Specifications

		declared average bystander position A-Weighted sound pressure levels (LpAm) when the product is operating in a 23°C ambient environment. Noise emissions were measured in accordance with ISO 7779 (ECMA 74) and declared in accordance with ISO 9296 (ECMA 109). Idle		
		L WAd	4.3 B	
		L pAm	26dB-A	
		Operating		
		L WAd	4.4 B	
		L pAm	28dB-A	
		NOTE: The Listed sound levels apply to standard shipping configurations. Additional options may result in increased sound levels.		
	Emissions	FCC Rating	Class B	
	Classification (EMC)	Normative Standards	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1	
		NOTE: Product conformance to cited product specifications is based on sample (type) testing, evaluation, or assessment. This product or family of products is eligible to bear the appropriate compliance logos and statements.		
HP Dynamic Smart	Dimensions	Embedded		
Array B120i Controller	Disk Drive and Enclosure Interface - Transfer rate	Up to 6Gb/s SATA (Serial ATA)		
	Connectors	6 internal SATA connectors		
	Server Interface	x4 PCle 2.0		
	SATA Speed	6Gb/s SATA links		
	Cache Memory	Zero Memory RAID has no cache memory		
	Logical Drives Supported	Up to 8 logical volumes (6 physical drives)		
	Host Memory Addressing	64-bit, supporting greater than 4GB server memory space		
	Hot Plug Support	Yes		
	RAID Support	RAID 0 (Striping), RAID	1 (Mirroring)	
		RAID 1+0 (Striping & Mirroring)		



Technical Specifications

HP Ethernet 1Gb 2-port	Network Interface	10Base-T/100Base-TX/1000Base-TX			
330i Adapter	Compatibility	IEEE 802.3 10Base-T			
		IEEE 802.3ab 1000Base-T			
		IEEE 802.3u 100Base-TX	K		
	Data Transfer Method	PCI-e, two lanes (x2)			
	Controller	BCM5717			
	Network Transfer Rate	10Base-T (Half-Duplex)	10 Mb/s per port, 20 Mb/s Combined		
		10Base-T (Full-Duplex)	20 Mb/s per port, 40 Mb/s Combined		
		100Base-TX (Half- Duplex)	100 Mb/s per port, 200 Mb/s Combined		
		100Base-TX (Full- Duplex)	200 Mb/s per port, 400 Mb/s Combined		
		1000Base-TX (Half- Duplex)	1000Mb/s per port, 2000 Mb/s Combined		
		1000 Base-TX (Full- Duplex)	2000Mb/s per port, 4000 Mb/s Combined		
	Connector	RJ-45			
	Cable Support	10Base-T	Categories 3, 4 or 5 UTP; up to 328 ft (100 m)		
		10/100/1000Base-TX	Category 5 or better; up to 328 ft (100 m)		
Environment-friendly Products and Approach	End-of-life Management and Recycling	Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: http://www.hp.com/go/green. To recycle your product, please go to: http://www.hp.com/go/green or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/green. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.			

© Copyright 2014 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less.

