

# WS-C2960-24TT-L Datasheet

Get a Quote

## Overview

WS-C2960-24TT-L is one of the Cisco Catalyst 2960 Series switches. Cisco Catalyst 2960 Series switches support voice, video, data, and highly secure access. They also deliver scalable management as your business needs change. The Common Features are included: Enhanced security including Cisco TrustSec for providing authentication, access control, and security policy administration, Multiple Fast or Gigabit Ethernet performance options, Cisco EnergyWise for power management, Scalable network management.

## Quick Specs

Figure 1 shows the appearance of the Cisco WS-C2960-24TT-L switch and its accessories.

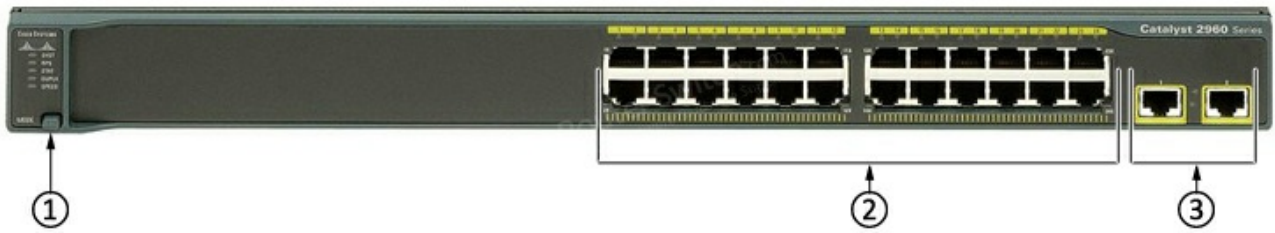


Table 1 shows the Quick Spec of the Cisco 2960-24TT-L switch.

Product Code	WS-C2960-24TT-L
Enclosure Type	Rack-mountable - 1U
Feature Set	LAN Base
Uplink Interfaces	2 x 10/100/1000 TX uplinks
Ports	24 x Ethernet 10/100 ports
Throughput	6.5 Mpps
Backplane Capacity	16 Gbps
DRAM	16 MB
Dimensions	1.73 x 17.5 x 9.3 in.
Package Weight	8.15 Kg

## Product Details

Figure 2 shows the front panel of the Cisco 2960-24TT-L switch.



Note:

(1)	LED Area
(2)	24 x Ethernet 10/100 ports
(3)	2 x 10/100/1000 TX uplinks

Figure 3 shows the back panel of the Cisco 2960-24TT-L switch.



Note:

(1)	RJ45 Console Port	(3)	RPS Connector
(2)	Fan Exhaust	(4)	AC power connector

## Compare to Similar Items

Table 2 shows the comparison of similar items.

Models	WS-C2960-24TT-L	<a href="#">WS-C2960-24TC-L</a>
Ports	24 x Ethernet 10/100 ports	24 x Ethernet 10/100 ports
Uplinks	2 x 10/100/1000 TX uplinks	2 dual-purpose uplinks
Feature Set	LAN Base	LAN Base

## Get more information

Do you have any question about the Cisco Catalyst C2960-24TT-L switch?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

# Specification

## WS-C2960-24TT-L Specifications

Type	Fixed
Topology	Ethernet (10/100BaseTX) Ethernet (10/100/1000BaseT)
Maximum Port density	24 10/100 ports
Uplinks	2 10/100/1000 ports
Modular/Expansion Slots	n/a
Architecture	Layer 2 Switching (basic connectivity), Layer 2 Switching (intelligent services), Voice Enabled
Form Factor	Fixed, Rack Mountable, Standalone/Clustering
Dimensions	1.73 x 17.5 x 9.3 in.
DRAM	16 MB
<b>Features</b>	
Specialized Service Modules	n/a
<b>Security</b>	
DHCP Snooping	
Dynamic ARP Inspection	
IP Source Guard	
RP Rate Limiters	
TCP Intercept	
802.1x	
Port Security	
Dynamic VLANs	
Private VLANs	
Private VLAN Edge	
Secure Shell	
SNMPv3	
Unicast RPF	
ACLs (L2-L4)	
Kerberos	
TACACS+	
RADIUS	
<b>High Availability/Resiliency</b>	
Hardware Redundancy	External Redundant Power Supply

High Availability/Resiliency	PVST, Broadcast Suppression, Unicast Suppression, Multicast Suppression, Spanning Tree, Portfast, Uplink Fast, Backbone Fast, 802.1s, 802.1w
<b>Management</b>	
Management features	SPAN, RSPAN, CiscoView, Cisco Discover Protocol (CDP), Virtual Trunking Protocol (VTP), Telnet Client, BOOTP, TFTP, CiscoWorks, CWSI, RMON, SNMP, Clustering, Web-Based Management
<b>Scalability</b>	
WAN Interface Support	n/a
Throughput	6.5 Mpps
Backplane Capacity	16 Gbps
Number of VLANs	255

## Want to Buy

Order Now

Get a Quote

## Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

## Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)